



TRANSFORMER INTEGRATED MANUAL GUN

OBARA CORPORATION

4-2-37 OGAMI, AYASE-SHI, KANAGAWA, JAPAN
TEL: +81-467-76-2000 FAX: +81-467-77-4692

OBARA CORPORATION USA (KENTUCKY PLANT)

1346 JAMIKELANE, ERLANGER, KY 41018 U.S.A.
TEL: +1-859-288-5490 FAX: +1-859-288-5498
<http://www.obarusa.com>

OBARA CORPORATION USA HERCULES WELDING PRODUCTS DIVISION

11478 TIMKEN AVE, WARREN, MICHIGAN 48089 U.S.A.
TEL: +1-586-755-1250 FAX: +1-586-755-6790
<http://www.obarusa.com>

OBARA INDIA PVT LTD.

W-17, F-2 BLOCK, MIDC PIMPRI, PUNE-411 018
TEL: +91-20-3068-8551 FAX: +91-20-3068-8550

OBARA (MALAYSIA) SDN. BHD.

NO.15 JALAN BUKIT BADUNG 26/4 HKOM SECTOR A,
40000 SHAH ALAM, SELANGOR DARUL EHSAN, MALAYSIA
TEL: +60-3-5191-9688 FAX: +60-3-5191-9699

OBARA MEXICO, S. DE R. L. DE C. V.

Roberto Díaz Rodríguez #212 Ciudad Industrial C.P. 20290
Aguascalientes, Ags. México
TEL: +52-449-971-1524 FAX: +52-449-971-1526

OBARA SHANGHAI

17 AIDU ROAD, WAI GAO QIAO BONDED AREA,
PU DONG NEW AREA, SHANGHAI 200131 CHINA
TEL: +86-21-5046-1510 FAX: +86-21-5046-2319

OBARA NANJING

5 DONGCUN ROAD JIANG NING ECONOMIC &
TECHNICAL DEVELOPMENT ZONE NANJING CHINA 211100
TEL: +86-25-5210-4304 FAX: +86-25-5210-5470

OBARA FRANCE

Rue Raoul Follereau, Chemin des allées
59300 Valenciennes, France
TEL: +33-327-23-7616 FAX: +33-327-23-7617
<http://www.obara.fr>

OBARA RUSSIA

191186 RUSSIA, ST-PETERSBURG,
MOIKA RIVER EMBANKMENT, 36
TEL: +7-812-331-6979

OBARA KOREA CORP.

933-7 Gumuncheon-ri, Hyangnam-eup,
Hwasong-si, Gyeonggi-do, Korea
TEL: +82-31-350-7060 FAX: +82-31-350-7099
<http://www.obara.co.kr>

OBARA AUSTRALIA PTY. LTD.

PO Box 5062 29-31 Star Crescent Hallm, Vic. 3808 Australia
TEL: +7-812-3316979 FAX: +7-812-3316979
<http://www.obara-aust.com.au>

OBARA CORP. UK

UNIT 1, TOMLINSON INDUSTRIAL ESTATE,
ALFRETON ROAD, DERBY, DE21 4ED, UK
TEL: +44-133-229-7868 FAX: +44-133-234-1600
<http://www.obara.uk>

OBARA CORPORATION, Czech branch, organizační složka


Česlávká 46, 537 01 Chrudim IV Identif. number: 27124134
Tax identity: CZ27124134
TEL: +42-046-931-8202 FAX: +42-046-931-8223
<http://www.obara.cz>

OBARA THAILAND

90/1 Moo5 Wellfrow Industrial Estate Soi6
Bangsak Bangkok Chachoengsao 24180 Thailand.
TEL: +66-38-571-928 FAX: +66-38-571-890




Best Choice With The Best Partner

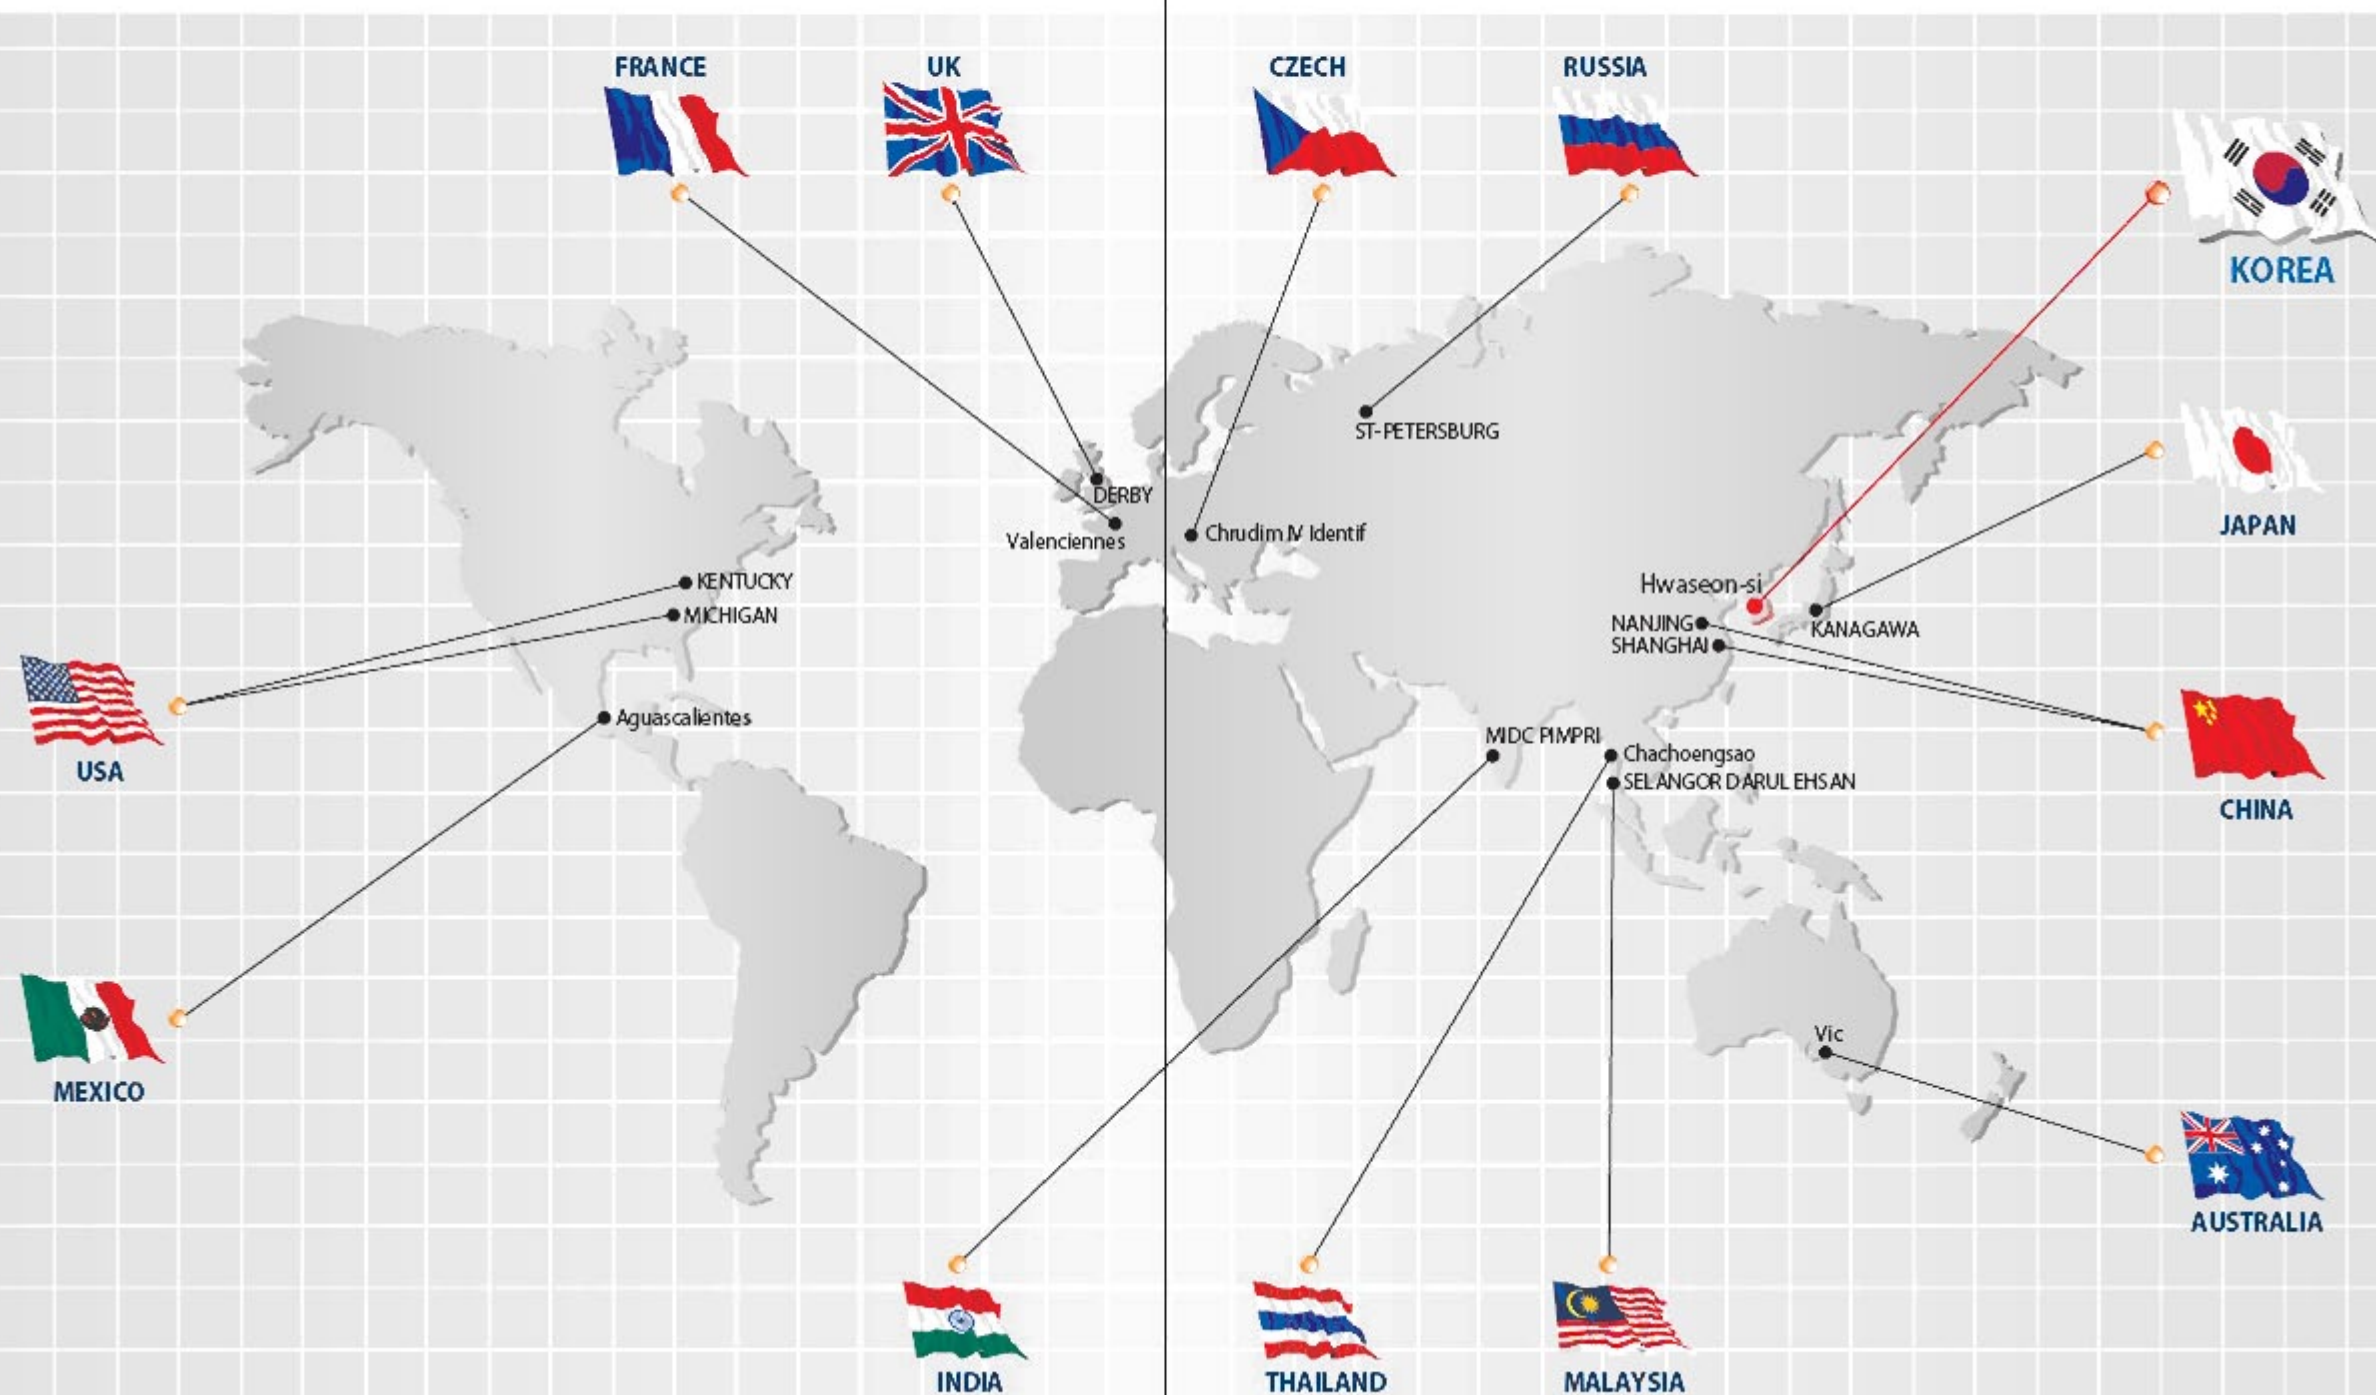

GUN INSTALLATION LAYOUT

FEATURE

1. It is possible to welding from 1/3~1/4 A-Class power capacity.
2. It is available to select Holder and Electronic part as working necessity.
3. It is designed for vertical and horizontal movement also balancing so it is easy to handle.
The Gun use bail support hanger basically so it is possible to rotate 360 degree.
4. Follow by working position can use the vertical and horizontal stopper.
5. The Gun covered by cover so it safe to the operator.
6. Handle and hand switch locate enough consider working place so depended on working position, operator can use the various switch.
7. The Gun has various depth 250mm~850mm(X-TYPE).
8. Alarm, Safety, Weld/No Weld switch, so it is easy to operate.
9. Exclusive controller has a ELB(30mA) it is basic equipment to protect from danger of 400v.
10. Exclusive controller has rich extendability with inter lock and inter check functions.

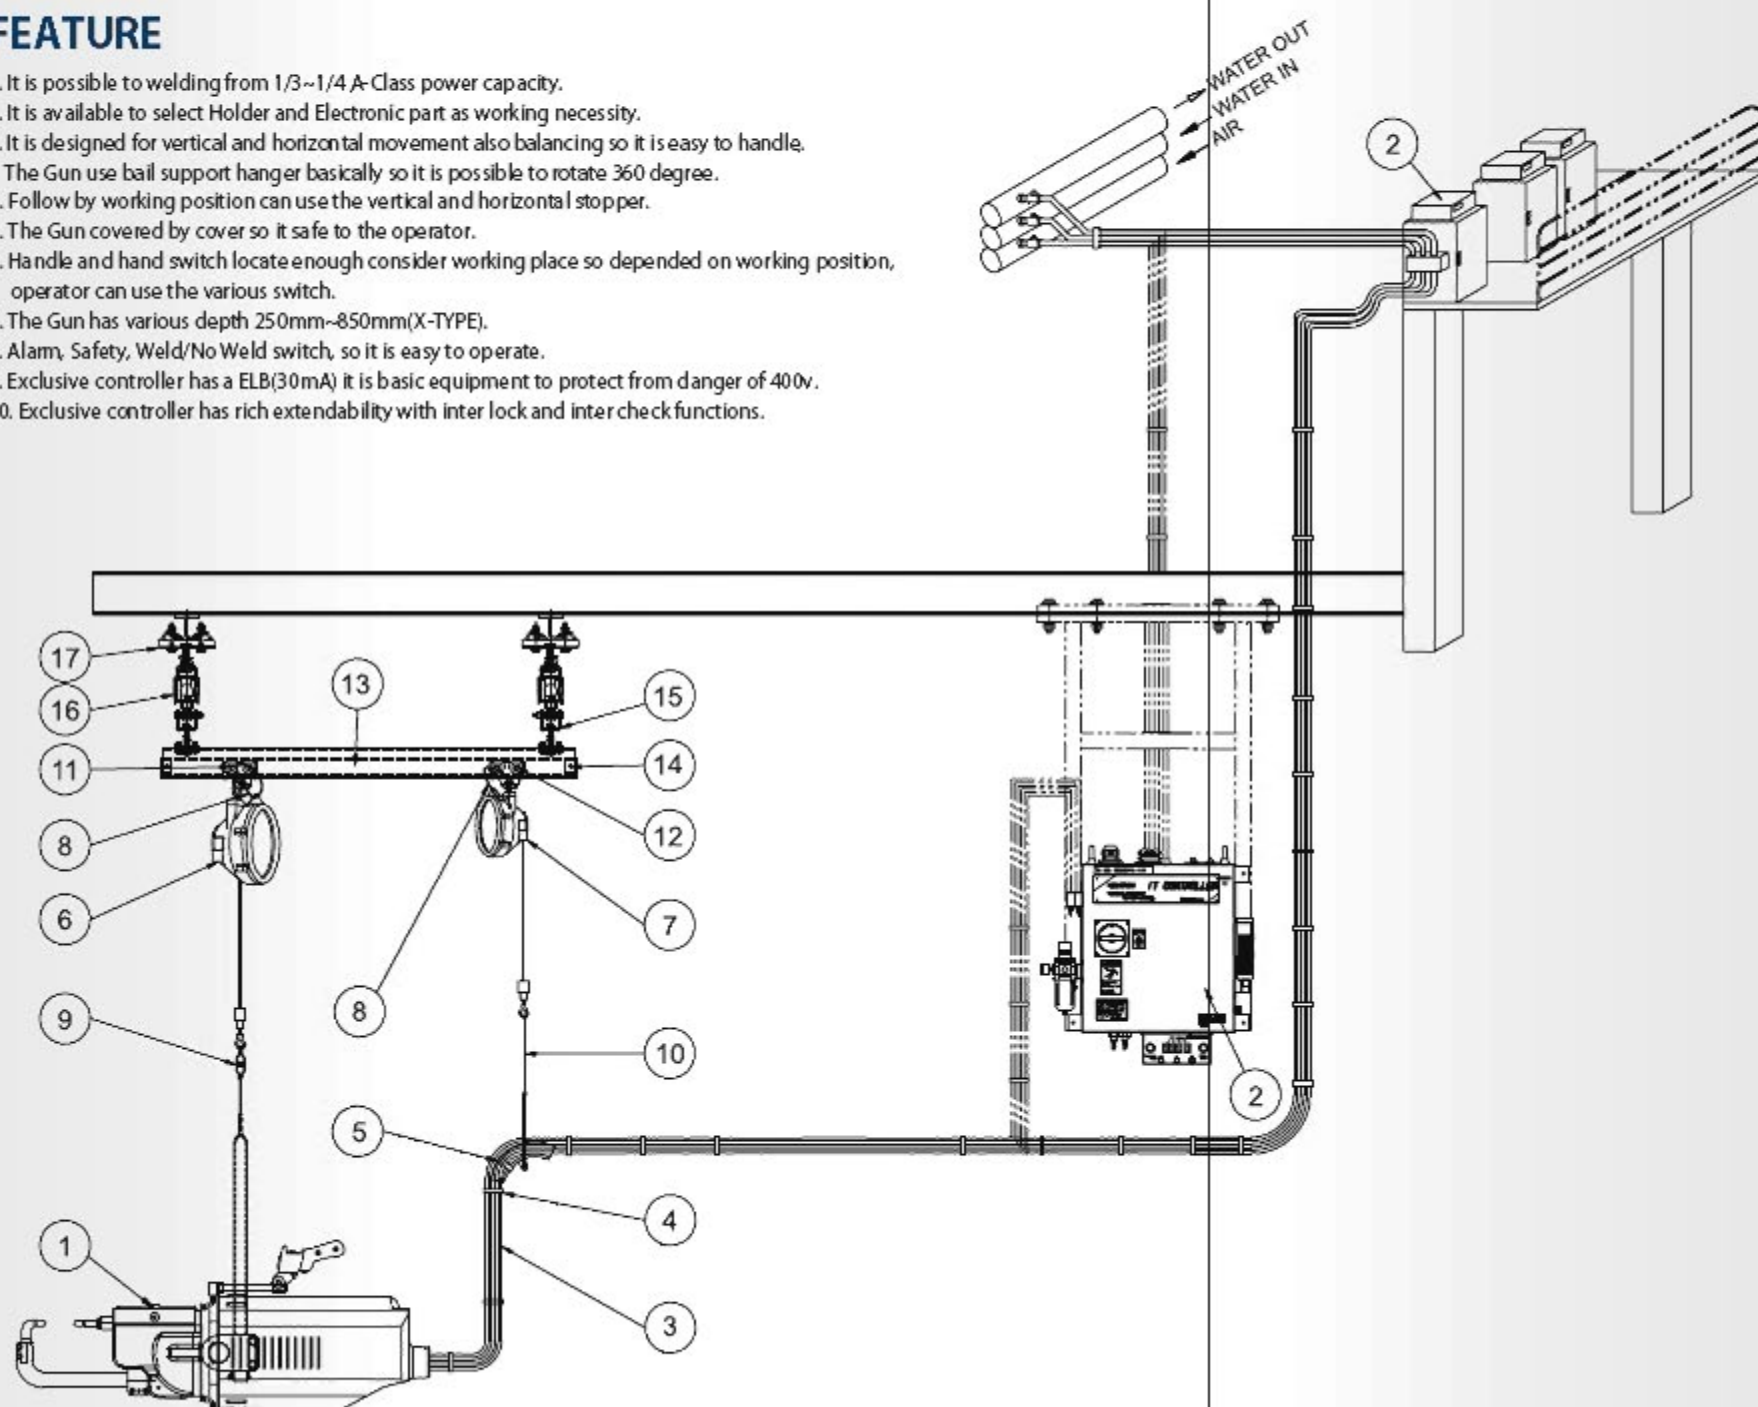

No.	NAME	No.	NAME
1	GUN Series	10	Extension Wire
2	Controller	11	Gun Trolley
3	Secondary Cable Ass'y	12	Cable Trolley
4	Rubber Band	13	Bridge Rail
5	Cable Band	14	End Stop
6	Spring Balancer	15	Bridge Rail Trolley
7	Spring Balancer	16	Runway Rail
8	Safety Wire	17	Hanger Kit
9	Swivel Hook		

Basic Specification

Allowable E. C. C	4000A, 5400A, 5700A(MFDC)	
Primary power supply	380V~400V(50Hz, 60Hz)	
Hanger	With 360° rotary bail (With longitudinal adjuster and stopper)	
Switches	WELD ON/OFF switch ALARM RESET switch WELD CONDITION SELECT switch RETRACT STROKE switch	
Cooling water circuit		
Secondary Cable	AC 25sq × 3	MFDC 25sq × 2+14sq × 1
Turn ratio	n=40, 50, 53, 56, 63	n=55
Controller	ITGC Series	

TRANSFORMER INTEGRATED MANUAL GUN



IXS



ICS



IXM



ICM




IXP




ICL
(CASTING)



IXL

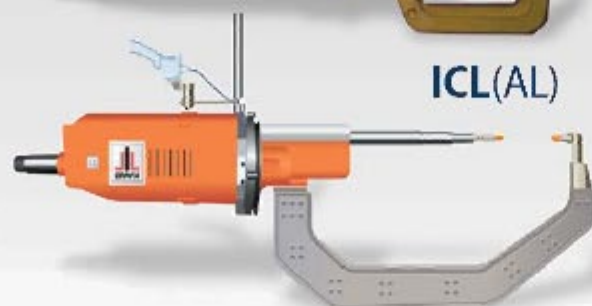


ICL (AL)

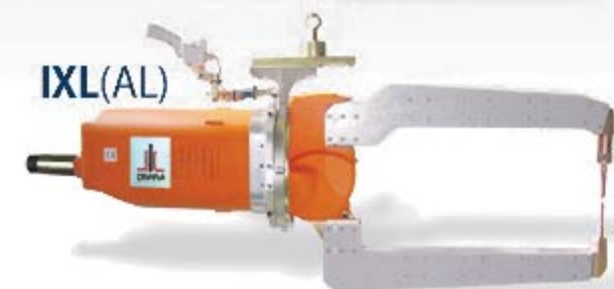

IXL (AL)



IXS

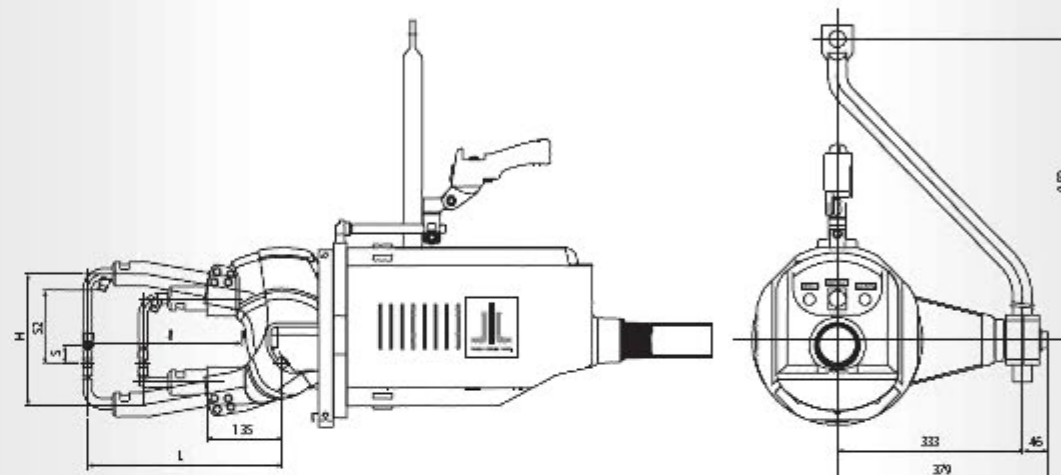

Technical Specifications


L(mm)		250			300			350		
g(mm)		177			227			277		
H(mm)		50~230								
M(A)		18,000			18,000			18,000		
W(Kg)		70	76	73	71	78	74	72	80	75
Transformer		3.6KVA	53KVA	MFDC	3.6KVA	53KVA	MFDC	3.6KVA	53KVA	MFDC
E. C. C. (A)		4,000	5,400	5,700	4,000	5,400	5,700	4,000	5,400	5,700
Electrode stroke	Welding stroke (S1)(mm)	30								
	Retract stroke (S2)(mm)	90			110			130		
Electrode Pressure	Electrode Force (Kg) (N)	410 (450) 4,018 (4,410)			350 (400) 3,430 (3,820)	350 (440) 3,430 (4,312)		300 (340) 2,940 (3,332)	300 (380) 2,940 (3,724)	
	Air pressure (Kg/cm ²)	5 (5.5)			5 (5.8)	5 (6.4)		5 (5.8)	5 (6.5)	
Cylinder Area (cm ²)		162								

M : Maximum short circuit current (A)

W : Weight (Kg)



IXM

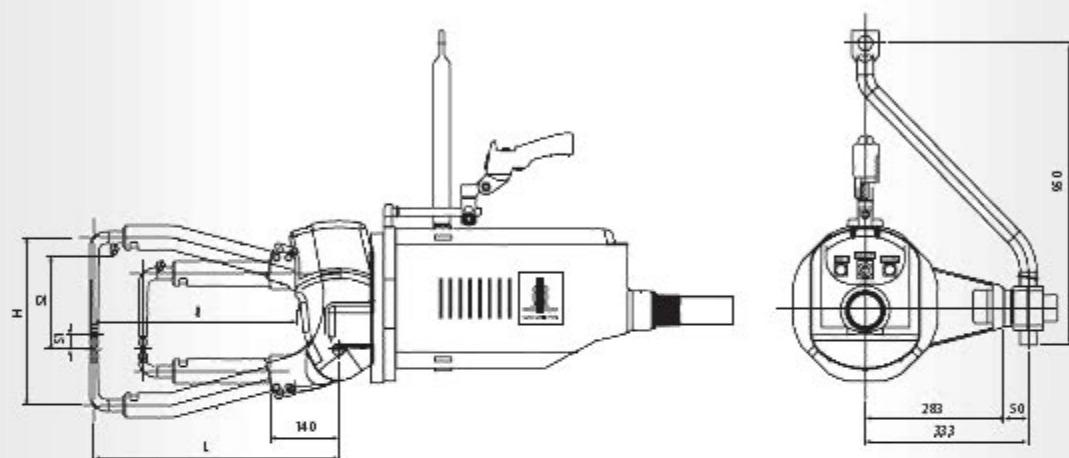


Technical Specifications

L(mm)		400			450			500		
g (mm)		315			365			415		
H (mm)		60~340								
M(A)		18,000			18,000			18,000		
W(Kg)		78	92	81	79	92	82	80	93	83
Transformer		36KVA	53KVA	MFDC	36KVA	53KVA	MFDC	36KVA	53KVA	MFDC
E. C. C. (A)		4,000	5,400	5,700	4,000	5,400	5,700	4,000	5,400	5,700
Electrode stroke	Welding stroke (S1)(mm)	30								
	Retract stroke (S2)(mm)	140			155			170		
Electrode Pressure	Electrode Force (Kgf)	450 (460)			400 (435)			350 (380)		
	(N)	4,410 (4,508)			3,920 (4,263)			3,430 (3,724)		
	Air pressure (Kgf/cm ²)	5 (5.1)			5 (5.5)			5 (5.3)		
	Cylinder Area (cm ²)	221								

M : Maximum short circuit current (A)
W : Weight (Kg)



IXP

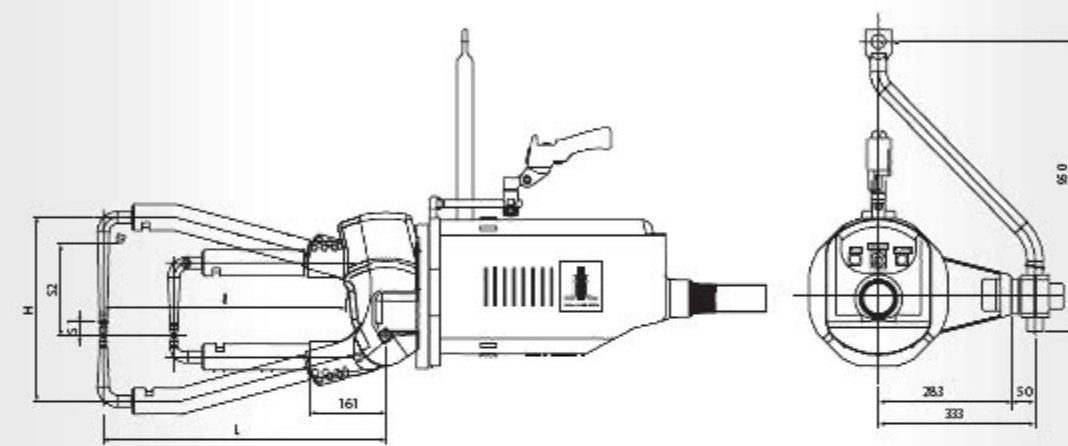


Technical Specifications

L(mm)		450			500			600		
g (mm)		364			414			514		
H(mm)		140~350								
M(A)		18,000			18,000			18,000		
W(Kg)		80	94	87	82	96	90	85	105	94
Transformer		36KVA	53KVA	MFDC	36KVA	53KVA	MFDC	36KVA	53KVA	MFDC
E. C. C. (A)		4,000	5,400	5,700	4,000	5,400	5,700	4,000	5,400	5,700
Electrode stroke	Welding stroke (S1)(mm)	30								
	Retract stroke (S2)(mm)	135			155			165		
Electrode Pressure	Electrode Force (Kgf)	400 (450)			350 (440)			300 (335)		
	(N)	3,920 (4,410)			3,430 (3,920)			2,940 (3,283)		
	Air pressure (Kg/cm ²)	5 (5.7)			5 (5.6)			5 (5.6)		
Cylinder Area (cm ²)		221								

M : Maximum short circuit current (A)
W : Weight (Kg)



IXL

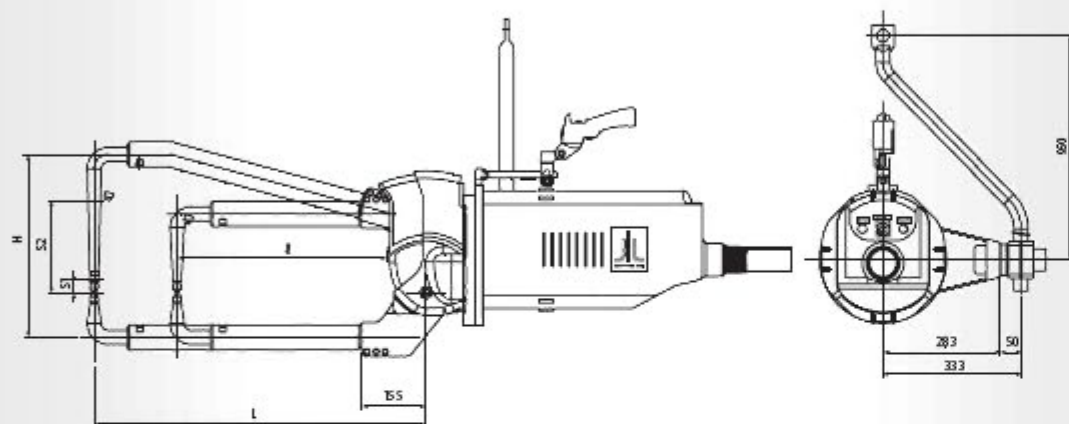

Technical Specifications


L(mm)		600		700		800	
g (mm)		505		605		705	
H (mm)		150~380					
M(A)		18,000		18,000		18,000	
W(Kg)		108	103	118	108	128	113
Transformer		53KVA	MFDC	60KVA	MFDC	60KVA	MFDC
E. C. C. (A)		5,400	5,700	5,400	5,700	5,400	5,700
Electrode stroke	Welding stroke (S1)(mm)	50					
	Retract stroke (S2)(mm)	165		190		220	
Electrode Pressure	Electrode Force (Kgf)	380 (450)		320 (390)		280 (330)	
	(N)	3,724 (4,410)		3,136 (3,822)		2,744 (3,234)	
Air pressure (Kgf/cm ²)		5 (6.0)		5 (6.0)		5 (6.0)	
Cylinder Area (cm ²)		280					

M : Maximum short circuit current (A)

W : Weight(Kg)



IXL(AL)

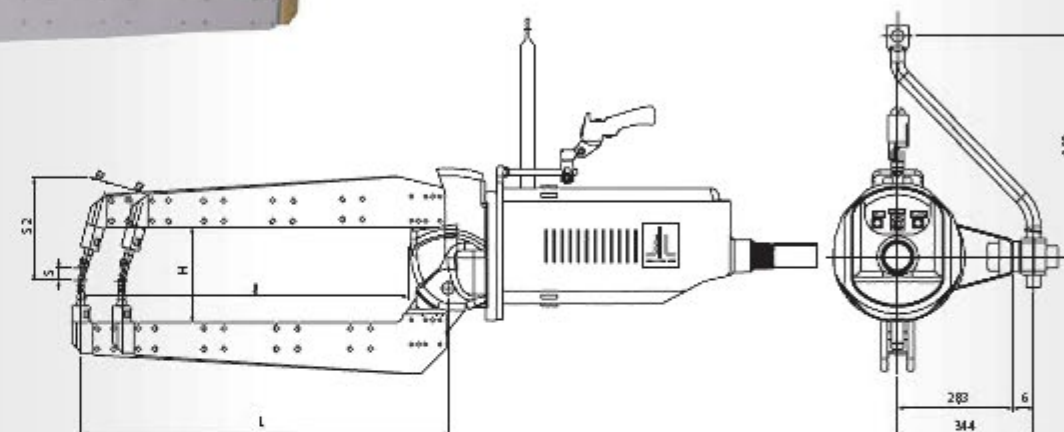

Technical Specifications


L(mm)		800		900	
ℓ(mm)		700		800	
H (mm)		230~400			
M(A)		18,000		18,000	
W(Kg)		120	105	125	110
Transformer		75KVA	MFDC	75KVA	MFDC
E. C. C. (A)		5,400	5,700	5,400	5,700
Electrode stroke	Welding stroke (S1)(mm)	50			
	Retract stroke (S2)(mm)	220		245	
Electrode Pressure	Electrode Force (Kgf)	340 (390)		300 (350)	
	(N)	3,332 (3,822)		3,940 (4,430)	
	Air pressure (Kgf/cm ²)	5 (5.7)		5 (5.7)	
Cylinder Area (cm ²)		339			

M : Maximum short circuit current (A)

W : Weight(Kg)



ICS

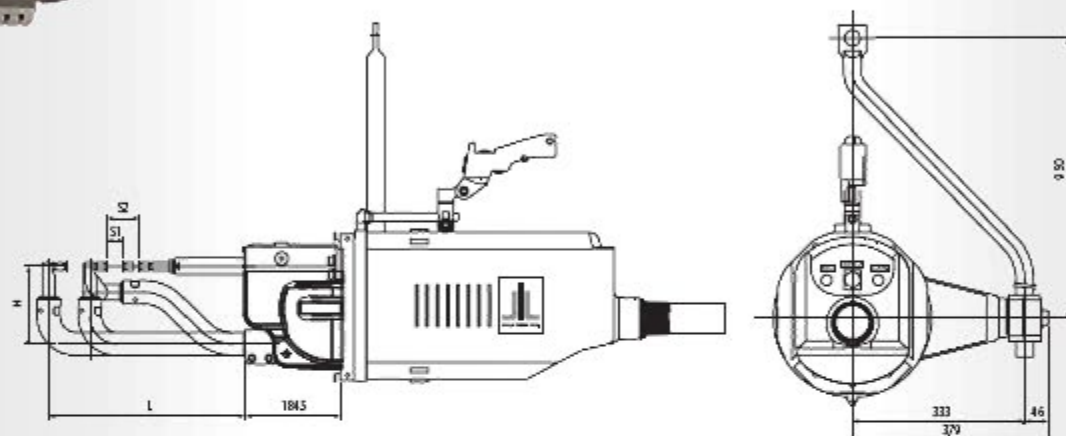

Technical Specifications


L(mm)	200	250	300
H(mm)		150	
M(A)	18,000	18,000	18,000
W(Kg)	65	66	67
Transformer	53KVA		
E. C. C. (A)	4,000		
Electrode stroke	Welding stroke (S1)(mm)	30	
	Retract stroke (S2)(mm)	105	
Electrode Pressure	Electrode Force (Kgf)	350	
	(N)	3,430	
	Air pressure (Kgf/cm ²)	5	
Cylinder Area (cm ²)		76.1	

M : Maximum short circuit current (A)

W : Weight (Kg)



ICM

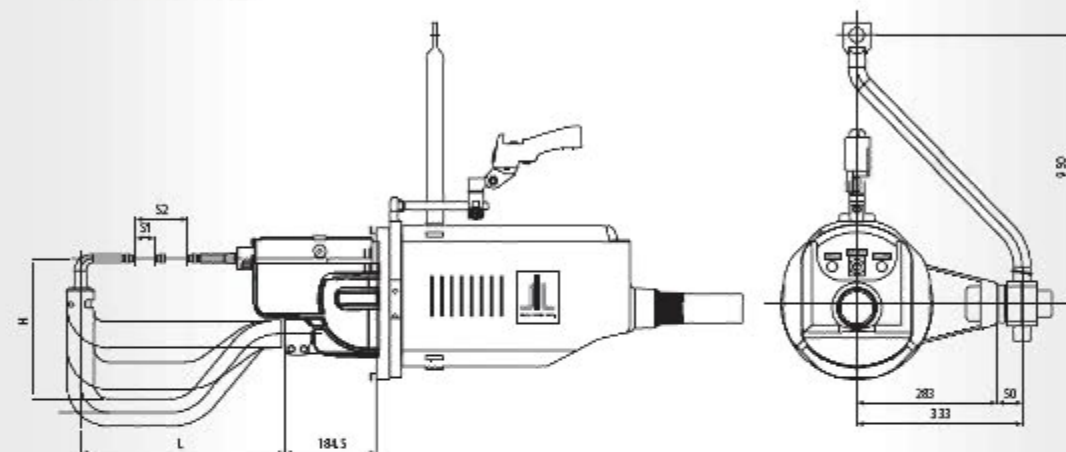


Technical Specifications

L(mm)		250			350			400		
H(mm)		130~200								
M(A)		18,000			18,000			18,000		
W(Kg)		70	78	72	74	81	75	76	84	77
Transformer		36KVA	53KVA	MFDC	41KVA	53KVA	MFDC	41KVA	53KVA	MFDC
E. C. C. (A)		4,000	5,400	5,700	4,000	5,400	5,700	4,000	5,400	5,700
Electrode stroke	Welding stroke (S1)(mm)	30								
	Retract stroke (S2)(mm)	105								
Electrode Pressure	Electrode Force (Kgf)	350	450		350	450		350	450	
	(N)	3,430	4,410		3,430	4,410		3,430	4,410	
	Air pressure (Kg/cm ²)	5	4.7		5	4.7		5	4.7	
Cylinder Area (cm ²)		76.1	101		76.1	101		76.1	101	

M : Maximum short circuit current (A)

W : Weight (Kg)

ICL(CASTING)

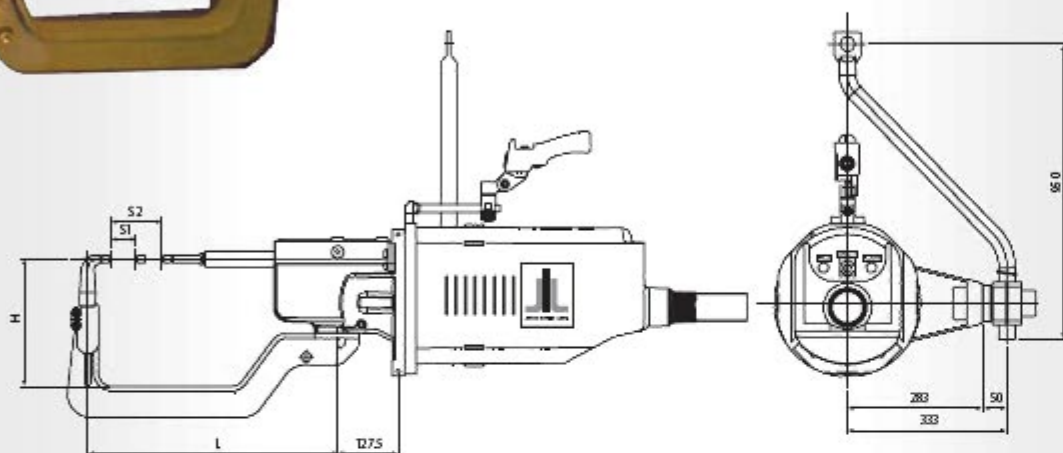


Technical Specifications

L(mm)		350			400			500		
H(mm)		200~350								
M(A)		15,000	18,000			18,000			18,000	
W(Kg)		73	81	76	75	83	78	77	85	80
Transformer		41KVA	53KVA	MFDC	41KVA	60KVA	MFDC	41KVA	60KVA	MFDC
E. C. C. (A)		4,000	5,400	5,700	4,000	5,400	5,700	4,000	5,400	5,700
Electro de stroke	Welding stroke (S1)(mm)	30								
	Retract stroke (S2)(mm)	105								
Electro de Pressure	Electrode Force (Kgf)	350	450		350	450		350	450	
	(N)	3,430	4,410		3,430	4,410		3,430	4,410	
	Air pressure (Kgf/cm ²)	5	4.7		5	4.7		5	4.7	
Cylinder Area (cm ²)		76.1	101		76.1	101		76.1	101	

M : Maximum short circuit current (A)

W : Weight (Kg)

ICL(AL)

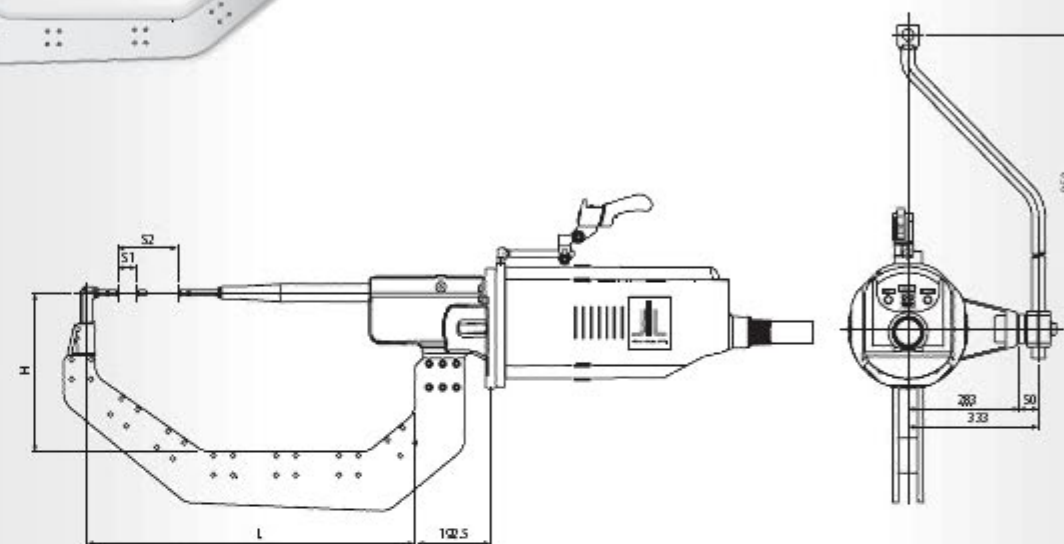

Technical Specifications

L(mm)		800			900		
H(mm)		300~400					
M(A)		13,000	16,000	18,000	13,000	16,000	18,000
W(Kg)		98	113	103	100	115	104
Transformer		41KVA	75KVA	MFDC	41KVA	75KVA	MFDC
E. C. C. (A)		4,000	5,400	5,700	4,000	5,400	5,700
Electrode stroke	Welding stroke (S1)(mm)	50					
	Retract stroke (S2)(mm)	155					
Electrode Pressure	Electrode Force (Kgf)	300					
	(N)	2,940					
	Air pressure (Kgf/cm ²)	4.1					
Cylinder Area (cm ²)		76.1					

M : Maximum short circuit current (A)

W : Weight (Kg)